


Installation Manual

Autostart Module for EVBox G2/G3

This manual explains how to install the autostart module in an EVBox G2/G3 charger.

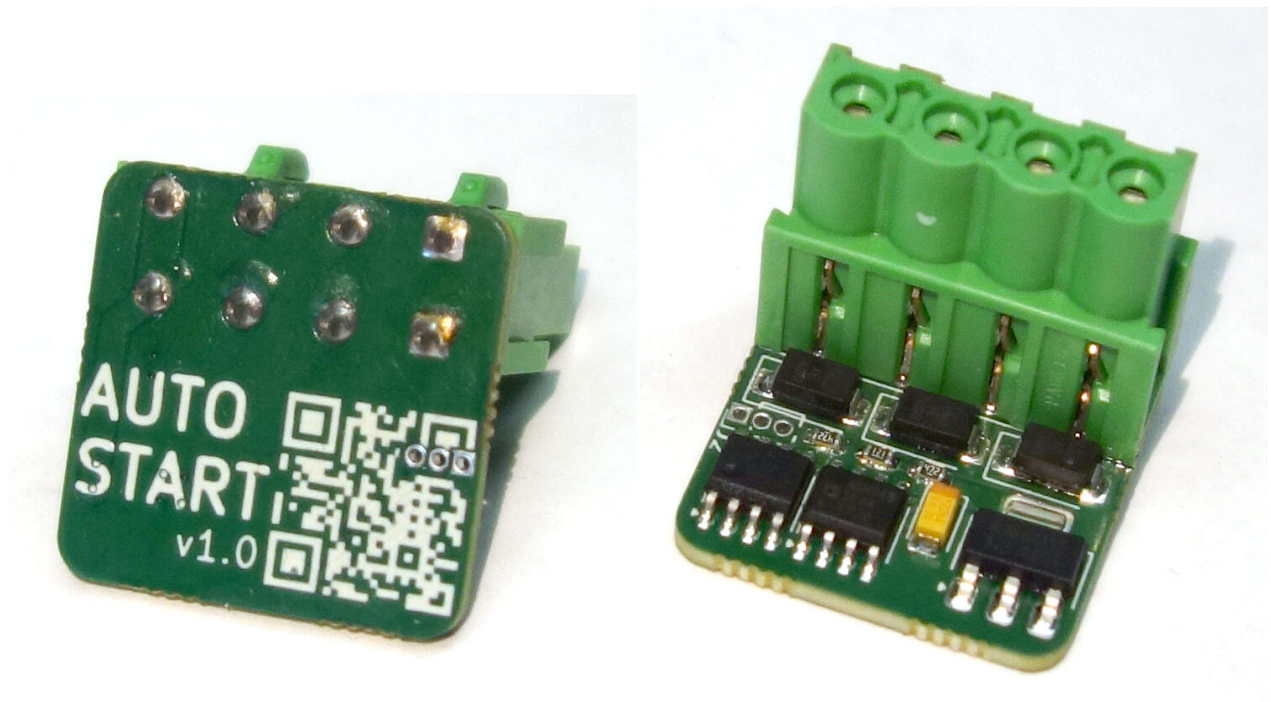

Package Contents

- Autostart module

Required Tools

- 4 mm Allen key
- Needle-nose pliers
- Scissors

More information


Further information about the autostart module can be found at: <https://www.geekabit.nl/as>

Step 1: Open the Charger Housing



1. Switch off power to the charger.
2. Wait a moment to allow internal components to fully discharge.
3. Remove the four screws on the back of the charger housing.
4. Take off the front cover.

Step 2: Remove the Mounting Plate

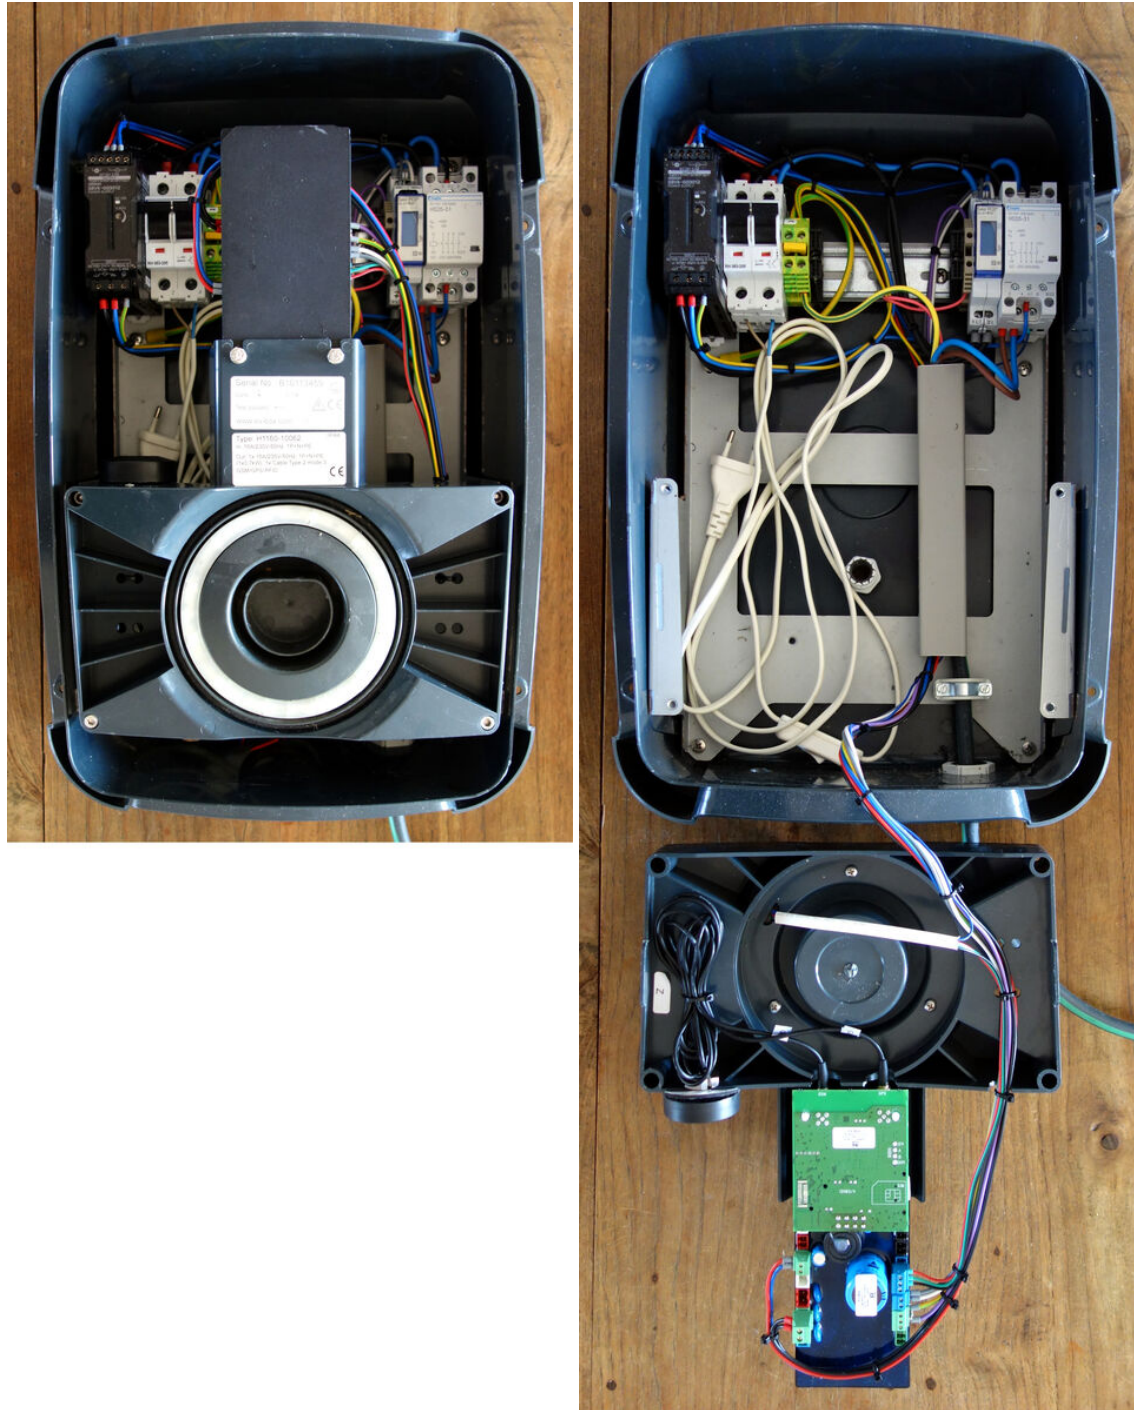


Inside the charger is a plastic mounting plate that holds the charging module.

1. Remove the four screws securing the mounting plate.
2. Carefully fold the mounting plate forward.

The charging module will remain connected via the cable bundle.

Step 3: Remove the Modem

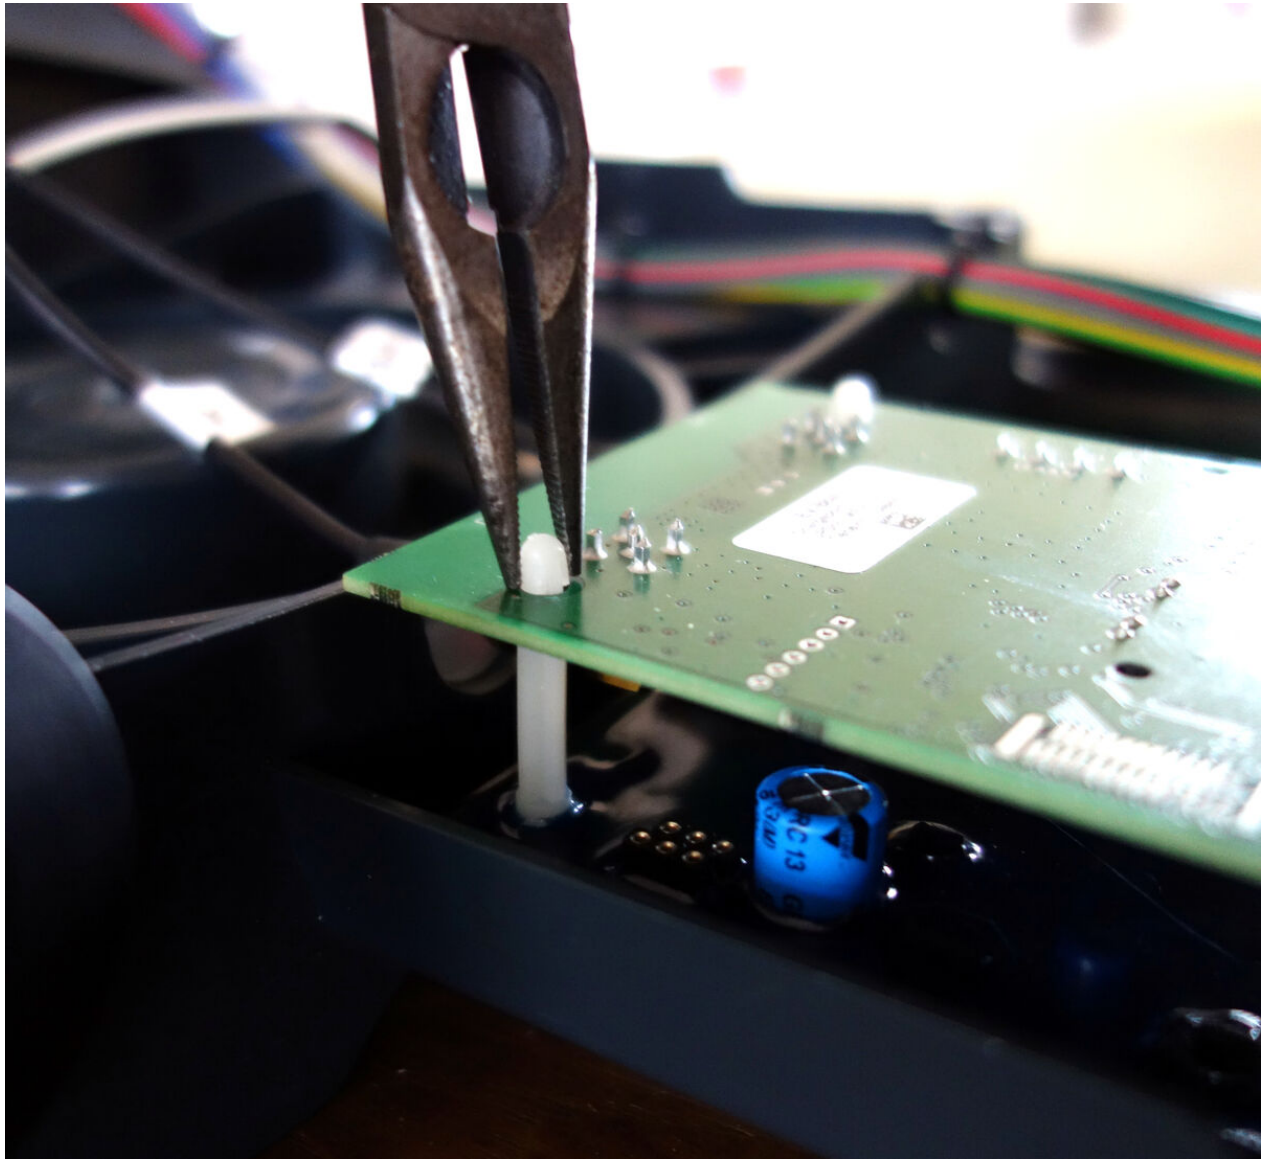

The modem is secured in two ways:

- One side via a green connector
- The other side via two white plastic support pins

1. Pull the modem straight out of the connector.
2. Use needle-nose pliers to squeeze the locking tabs of each support pin.
3. Pull the modem off the support pins.

Note: Keep the modem. It can be reinstalled at a later time if required.

Step 4: Antenna




A small flat antenna is connected to the modem.

- This antenna is not required for the autostart module.
- The antenna may be left in place or removed completely.

To remove the antenna:

1. Unscrew the nut underneath the antenna by hand.
2. Unscrew the two connectors from the modem.
3. Cut any cable ties with scissors if necessary.

Step 5: Install the Autostart Module

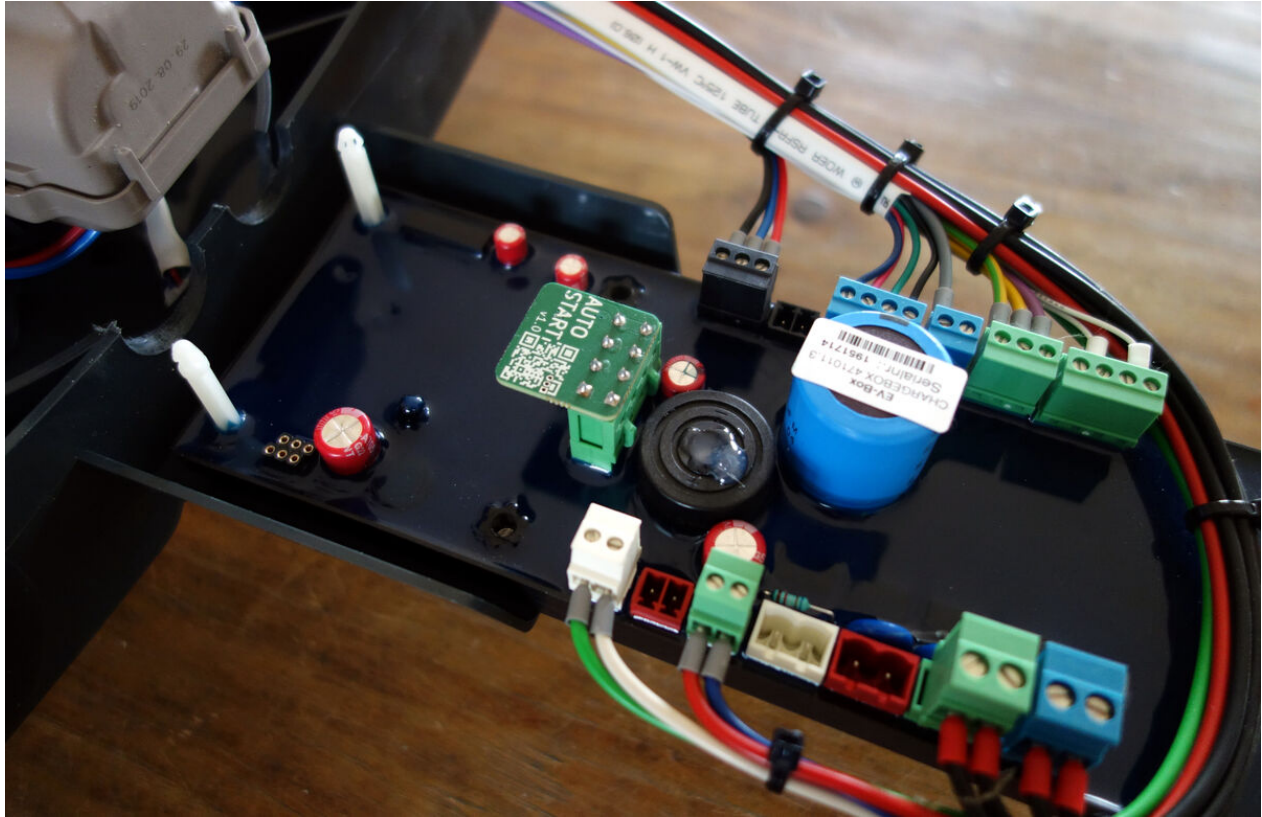

1. Place the autostart module onto the green modem connector.
2. Press the module firmly into place until fully inserted.

The white plastic support pins are not used.

Step 6: Close the Charger Housing

1. Fold the mounting plate back into position.
2. Secure the mounting plate using the four screws.
3. Reinstall the front cover.
4. Reinstall the four screws on the back of the charger housing.
5. Restore power to the charger.

The charger is ready for immediate use.

Testing

1. Connect a charging cable to a vehicle.
2. Charging should start automatically.

If charging does not start:

- Verify that the autostart module is correctly installed on the connector.

Operation

After installation of the autostart module, the charger operates as an autostart charger:

- Plug in the cable to start charging automatically
- No subscription required
- No charging card or key fob needed